





LED T8 TUBES

TECHNICAL SPECIFICATIONS

CCT	4000K (3000/5500K on request)
CRI	>80Ra
INPUT VOLTAGE	AC 100-240V
PF	≥0.93
POWER FREQUENCY	50/60 Hz
LIFETIME	L70 >52,000 hrs. @ 40°C ambient
WORKING TEMPERATURE	-20°C to +40°C
IP GRADE	IP20
T8 TUBE DIAMETER	26mm
LED DRIVER	Internal driver
LED LIGHT SOURCE	EPISTAR
THERMAL MANAGEMENT	Passive
OPTICS	Frosted (transparent on request)
BEAM ANGLE	120°



CODE	POWER	LUMINOUS FLUX	LENGTHS
VER-ET8-F600-10-840	11W	1,050 lm	588mm / 2ft
VER-ET8-F900-14-840	14W	1,400 lm	894mm / 3ft
VER-ET8-F1200-18-840	18W	1,950 lm	1,198 mm / 4ft
VER-ET8-F1500-24-840	24W	2,450 lm	1,498 mm / 5ft

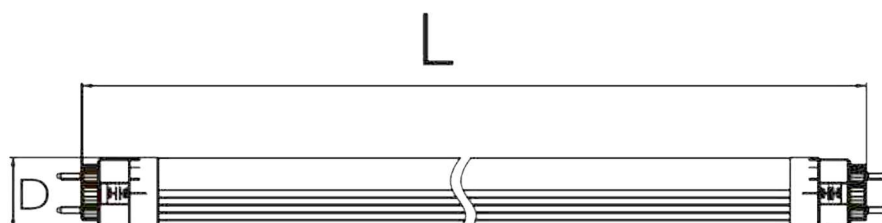

L2(Nom)	L3(Nom)	L4(Nom)	L5(Nom)	D(Nom)	Base
588mm	894mm	1,198mm	1,498mm	26mm	G13



VERDE LED HQ

VERDE House,
Wellington Road
Cork,
Ireland

T. + 353 - 21 - 486 - 1577
F. + 353 - 21 - 486 - 1572
E. info@verdeled.com

